

This drawing is the property of Carbon Composites, Inc. (CCI) and shall not be used in any way without the express written consent of CCI. This information is considered proprietary and shall not be distributed without written consent from CCI.

| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |
| | | | | |

Foil Face (Optional)

Carbon/Carbon Sheet

Rigidized Felt:


Graphite Foil

Carbon/Carbon Sheet

Foil Face (Optional)

Composite Sandwich Board (CSB)

Typical Cross-Section

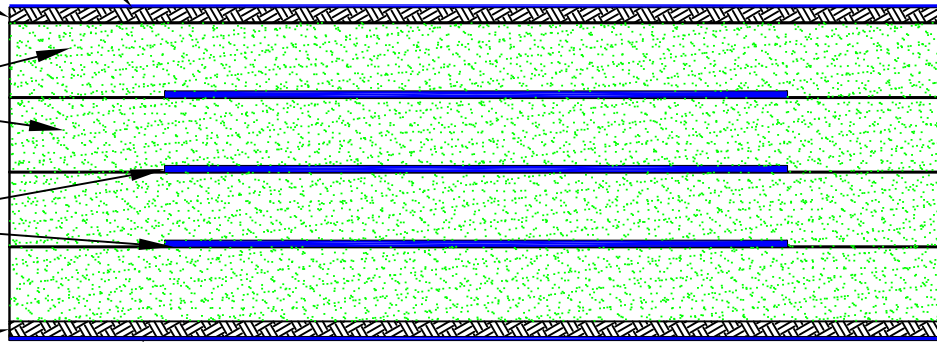

Notes:

- 1) Carbon/Carbon Sheets: Typical Thickness 0.02" (0.16" Max)
- 2) Graphite Foil: Thickness 0.02" or 0.012" between felt layers. Optionally it may be bonded to one or both faces.
- 3) Rigidized Felt: 0.5" thick layers standard with 0.25" and 0.125" also available.

| | | | | |
|--|--------------|---|-------------------------|----------|
| Carbon Composites, Inc. 12 Jytek Park Leominster, MA 01453. | | Carbon Composites, Inc. | | |
| Tolerances Angles: ± 0°30' .X ±0.030 .XX ±0.020 .XXX ±0.010 | | TITLE: (CSB) Composite Sandwich Board Typical Cross-Section View | | |
| Material: see notes | SIZE | FSCM NO. | DWG NO. DBS-121604-1 | REV A |
| www.CarbonCompositesInc.com | SCALE NTS | SHEET 1 of 1 | | |